

08/15/00
jc893 U.S. PRO

NEW, CONTINUATION, DIVISIONAL OR
CONTINUATION-IN-PART APPLICATION
UNDER 37 C.F.R. §1.53(b)

Attorney Docket No. 0315000496

Express Mail Label No. EL 581 386 991 US

Date August 15, 2000

jc892 U.S. PRO
09/639004
08/15/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Hon. Commissioner of Patents and Trademarks
Washington, D. C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R §1.53(b) is a patent application for **SCROLL MACHINE WITH PORTED ORBITING SCROLL MEMBER**

identified by: ☐ First named inventor _____
or ☒ Attorney Docket No. (see above)

1. Type of Application

☒ This application is a new (non-continuing) application.

☐ This application is a ☐ continuation / ☐ divisional / ☐ continuation-in-part of prior application No. _____. Amend the specification by inserting before the first line the sentence:

--This is a [continuation/division/continuation-in-part] of United States patent application No. _____, filed _____.--

☐ The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

If for some reason applicant has not requested a sufficient extension of time in the parent application, and/or has not paid a sufficient fee for any necessary response in the parent application and/or for the extension of time necessary to prevent the abandonment of the parent application prior to the filing of this application, please consider this as a Request for an Extension for the required time period and/or authorization to charge our Deposit Account No. 08-0750 for any fee that may be due. THIS FORM IS BEING FILED IN TRIPLICATE: one copy for this application; one copy for use in connection with the Deposit Account (if applicable); and one copy for the above-mentioned parent application (if any extension of time is necessary).

2. Contents of Application

a. Specification of 19 pages;

☐ A microfiche computer program (Appendix);

☐ A nucleotide and/or amino acid sequence submission;

☐ Because the enclosed application is in a non-English language, a verified English translation ☐ is enclosed ☐ will be filed.

☐ Cancel original claims _____ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing date purposes.)

b. ☒ Drawings on 4 sheets;

Attorney Docket No. 0315000496
Express Mail Label No. EL 581 386 991 US
Date August 15, 2000

c. ☒ A signed Declaration is enclosed.

The enclosed Declaration is ☒ newly executed / ☐ a copy from a prior application under 37 C.F.R. §1.63(d) / ☐ accompanied by a statement requesting the deletion of person(s) not inventors in the continuing application.

d. **Fees**

FILING FEE	Number		Number		Rate		Basic Fee
CALCULATION	Filed		Extra				\$690.00
Total Claims	33	- 20 =	13	×	\$18.00	=	234.00
Independent Claims	3	- 3 =	0	×	\$78.00	=	0.00
Multiple Dependent Claim(s) Used						\$260.00 =	
FILING FEE - NON-SMALL ENTITY							924.00
FILING FEE - SMALL ENTITY: Reduction by 1/2							
[] Verified Statement under 37 C.F.R. §1.27 is enclosed.							
[] Verified Statement filed in prior application.							
Assignment Recordal Fee (\$40.00)							40.00
37 C.F.R. §1.17(k) Fee (non-English application)							
TOTAL							\$964.00

☒ A check is enclosed to cover the calculated fees. The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment, to Deposit Account No. 08-0750. A duplicate copy of this document is enclosed.

☐ The calculated fees will be paid within the time allotted for completion of the filing requirements.

☐ The calculated fees are to be charged to Deposit Account No. 08-0750. The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment, to said Deposit Account. A duplicate copy of this document is enclosed.

3. **Priority Information**

☐ **Foreign Priority:** Priority based on _____ Application No. _____, filed _____, is claimed.

☐ A copy of the above referenced priority document ☐ is enclosed / ☐ will be filed in due course, pursuant to 35 U.S.C. §119(a)-(d).

☐ **Provisional Application Priority:** Priority based on United States Provisional Application No. _____, filed _____, is claimed under 35 U.S.C. §119(e).

Attorney Docket No. 0315000496
Express Mail Label No. EL 581 386 991 US
Date August 15, 2000

4. **Other Submissions**


- ☐ A Preliminary Amendment is enclosed.
- ☐ An Information Disclosure Statement, _____ sheets of PTO Form 1449, and _____ patent(s)/publications/documents are enclosed.
- ☒ A power of attorney
☒ is submitted with the new Declaration.
- ☐ is of record in the prior application and ☐ is in the original papers / ☐ a copy is enclosed.
- ☒ An Assignment of the invention
☒ is enclosed with a cover sheet pursuant to 37 C.F.R. §§3.11, 3.28 and 3.31.
- ☐ is of record in a prior application. The assignment is to _____, and is recorded at Reel _____, Frame(s) _____.
- ☒ An Establishment of Assignee's Right To Prosecute Application Under 37 C.F.R. §3.73(b), and Power Of Attorney is enclosed.
- ☒ An Express Mailing Certificate is enclosed.
- ☐ Other: _____

Attention is directed to the fact that the correspondence address for this application is:

Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303
(248) 641-1600.

Respectfully,

Date August 15, 2000
Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303
(248) 641-1600

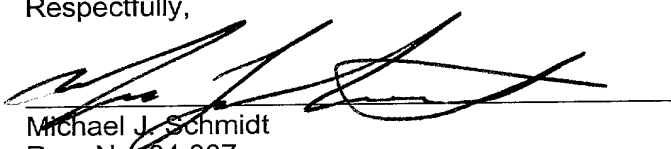
Michael J. Schmidt
Reg. No. 34,007

08-16-00

HARNES, DICKEY & PIERCE, P.L.C.
ATTORNEYS AND COUNSELORS
P.O. BOX 828
BLOOMFIELD HILLS, MICHIGAN 48303
U.S.A.



TELEPHONE
(248) 641-1600
TELEFACSIMILE
(248) 641-0270



Date: August 15, 2000

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231

Sir:

EXPRESS MAILING CERTIFICATE

Applicants: Michael Mikhaylovich Perevozchikov and Roy Doecker

Serial No. (if any):

For: **Scroll Machine With Ported Orbiting Scroll Member**


Docket: 0315000496

Attorney: Michael J. Schmidt

"Express Mail" Mailing Label Number **EL 581 386 991 US**

Date of Deposit **August 15, 2000**

I hereby certify and verify that this Express Mail Certificate (label no. **EL 581 386 991 US**), patent application transmittal (in triplicate), check in the amount of \$964.00 (\$690.00 application fee \$234.00 excess claims fee and \$40.00 assignment recordal fee), 19 pgs. patent application with executed declaration, 4 pgs. drawings showing FIGS. 1-7, assignment with requisite cover sheet, establishment of assignee's right to prosecute application under 37 C.F.R. § 3.73 and power of attorney, and postcard are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.


Debra J. Coughlin

09639004 034570

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Group Art Unit:)
Examiner:)
Inventor(s): Perevozchikov et al.)
Serial No.)
Filed:)
For: **Scroll Machine With Ported Orbiting**)
Scroll Member)

**ESTABLISHMENT OF
ASSIGNEE'S RIGHT TO
PROSECUTE APPLICATION
UNDER 37 C.F.R. § 3.73(b),
AND POWER OF ATTORNEY**



Hon. Commissioner Of Patents & Trademarks
Washington, D. C. 20231

Sir:

Under 37 C.F.R. § 3.73(b), the undersigned hereby states that documents evidencing an Assignment of the above-identified Application to the Assignee identified below have been reviewed, and further certifies that, to the best of Assignee's knowledge and belief, said Assignee is the owner of all right, title and interest in said Application:

Assignee: Copeland Corporation
a Delaware Corporation
1675 W. Campbell Road
Sidney, Ohio 45365-0669

Assignment Document: X filed herewith.
 previously filed,
Reel No. _____, Frame No. _____.

I hereby declare that all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these

statements are made with the knowledge that willful false statements, and the like so made, are punishable by fine or imprisonment, or both, under Section 1001, Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Assignee furthermore hereby appoints Michael J. Schmidt, Reg. No. 34,007, and each other principal, attorney of counsel, associate and employee of Harness, Dickey & Pierce, P.L.C., who is a registered Patent Attorney, as attorney of record, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. I request the Patent and Trademark Office to direct all correspondence and telephone calls relative to this application to Harness, Dickey & Pierce, P.L.C., P. O. Box 828, Bloomfield Hills, Michigan 48303 (telephone 810-641-1600).

Jean-Luc Caillat

Name: Jean-Luc Caillat

Title: Vice President, Research

Date: August 8th, 2000

Assignee: Copeland Corporation

SCROLL MACHINE WITH PORTED ORBITING SCROLL MEMBER

Field of the Invention

5 The present invention relates generally to scroll-type machines. More particularly, the present invention relates to hermetic scroll compressors incorporating a fluid injection system where the fluid injection system utilizes a fluid passage extending through the end plate of the orbiting scroll member.

Background and Summary of the Invention

10 Refrigeration and air conditioning systems generally include a compressor, a condenser, an expansion valve or an equivalent, and an evaporator. These components are coupled in sequence in a continuous flow path. A working fluid flows through the system and alternates between a liquid phase and a vapor or gaseous phase.

15 A variety of compressor types have been used in refrigeration systems, including but not limited to reciprocating compressors, screw compressors and rotary compressors. Rotary type compressors can include the various vane type compressors as scroll machines. Scroll compressors are constructed using two scroll members with each scroll member having an end plate and a spiral wrap. The scroll members are
20 mounted so that they may engage in relative orbiting motion with respect to each other. During this orbiting movement, the spiral wraps define a successive series of enclosed spaces or pockets, each of which progressively decrease in size as it moves inwardly from a radial outer position at a relatively low suction pressure to a central position at a relatively high pressure. The compressed gas exits from the enclosed space at the
25 central position through a discharge passage formed through the end plate of one of the scroll members.

The designers for these scroll-type machines need to have access to these enclosed spaces or pockets as they move between suction and discharge for various reasons. One reason for accessing these moving pockets is to inject oil into the pockets in order to lubricate and cool the scroll members as they compress the fluid. Another reason for accessing these moving pockets, for a refrigerant compressor, is to inject liquid refrigerant to provide cooling for the scroll members. Another reason for accessing these moving pockets is to connect these intermediate pockets to the suction zone of the compressor in order to reduce the capacity of the compressor in a capacity modulation system. Still another reason for accessing these moving pockets is to inject an additional quantity of the fluid being compressed in vapor form in order to increase the compression ratio or capacity of the scroll machine.

Various prior art methods have been utilized to gain access to these moving pockets. When the access to these moving pockets does not require access from outside the hermetic shell of the compressor, such as oil injection and/or capacity modulation, the access can be achieved through either the orbiting scroll or the non-orbiting scroll, depending on the design intent for the injection system. When the access to these moving pockets does require access from outside the hermetic shell, such as liquid injection and vapor injection systems, the access is provided through the stationary or non-orbiting scroll due to the ease of communicating with a stationary scroll member rather than the moving orbiting scroll member.

The continued development for fluid injection systems include the optimizing of the designs for gaining access to the moving pockets of compressed fluid. The present invention provides the art with a method of accessing the moving fluid pockets from outside the hermetic shell of the compressor through a passage extending through the end plate of the orbiting scroll member. Accessing the moving pockets from outside the hermetic shell through the orbiting scroll provides for less expensive and simpler

assembly of the scroll machine as well as less expensive machining requirements for the scroll members.

Other advantages and objects of the present invention will become apparent to those skilled in the art from the subsequent detailed description, appended claims and
5 drawings.

Brief Description of the Drawings

In the drawings which illustrate the best mode presently contemplated for carrying out the present invention:

10 Figure 1 is a vertical cross sectional view of a scroll compressor incorporating a unique fluid injection system in accordance with the present invention;

Figure 2 is a plan view, partially in cross-section of the scroll compressor shown in Figure 1;

15 Figure 3 is an enlarged cross-sectional view showing the injection system for the compressor shown in Figure 1;

Figure 4 is a plan view, partially in cross-section, of a unique fluid injection system in accordance with another embodiment of the present invention;

Figure 5 is an enlarged cross-sectional view showing the injection system shown in Figure 4;

20 Figure 6 is a plan view, partially in cross-section, of a unique fluid injection system in accordance with another embodiment of the present invention; and

Figure 7 is an enlarged cross-sectional view showing the injection system shown in Figure 6.

25 **Detailed Description of the Preferred Embodiment**

Referring now to the drawings in which like reference numerals designate like or corresponding parts throughout the several views, there is shown in Figure 1 a

hermetic shell compressor incorporating the unique fluid injection system in accordance with the present invention which is identified generally by the reference numeral 10. Scroll compressor 10 comprises a generally cylindrical hermetic shell 12 having welded at the upper end thereof a cap 14 and at the lower end thereof a base 16 having a plurality of mounting feet (not shown) integrally formed therewith. Cap 14 is provided with a refrigerant discharge fitting 18 which may have the usual discharge valve therein (not shown). Other major elements affixed to shell 12 include a transversely extending partition 20 which is welded about its periphery at the same point cap 14 is welded to shell 12, an inlet fitting 22, a main bearing housing 24 which is suitably secured to shell 12 and a lower bearing housing 26 having a plurality of radially outwardly extending legs each of which is suitably secured to shell 12. A motor stator 28 which is generally square in cross-section but with the corners rounded off is press fit into shell 12. The flats between the rounded corners on stator 28 provide passageways between stator 28 and shell 12 which facilitate the return flow of the lubricant from the top of shell 12 to its bottom.

A drive shaft or crankshaft 30 having an eccentric pin 32 at the upper end thereof is rotatably journaled in a bearing 34 in main bearing housing 24 and in a bearing 36 in lower bearing housing 26. Crankshaft 30 has at the lower end thereof a relatively large diameter concentric bore 38 which communicates with a radially outwardly located smaller diameter bore 40 extending upwardly therefrom to the top of crankshaft 30. Disposed within bore 38 is a stirrer 42. The lower portion of the interior shell 12 is filled with lubricating oil and bores 38 and 40 act as a pump to pump the lubricating oil up crankshaft 30 and ultimately to all of the various portions of compressor 10 which require lubrication.

Crankshaft 30 is relatively driven by an electric motor which includes motor stator 28 having windings 44 passing therethrough and a motor rotor 46 press fitted onto crankshaft 30 and having upper and lower counterweights 48 and 50, respectively.

A motor protector 52, of the usual type, is provided in close proximity to motor windings 44 so that if the motor exceeds its normal temperature range, motor protector 52 will de-energize the motor.

5 The upper surface of main bearing housing 24 is provided with an annular flat thrust bearing surfaces 54 on which is disposed an orbiting scroll member 56. Scroll member 56 comprises an end plate 58 having the usual spiral valve or wrap 60 on the upper surface thereof and an annular flat thrust surface 62 on the lower surface thereof. Projecting downwardly from the lower surface is a cylindrical hub 64 having a journal bearing 66 therein and in which is rotatively disposed a drive bushing 68 having an inner
10 bore within which crank pin 32 is drivingly disposed. Crank pin 32 has a flat on one surface (not shown) which drivingly engages a flat surface in a portion of the inner bore of drive bushing 68 to provide a radially compliant drive arrangement such as shown in assignee's U.S. Patent No. 4,877,382, the disclosure of which is incorporated herein by reference.

15 Wrap 60 meshes with a non-orbiting scroll wrap 72 forming part of a non-orbiting scroll member 74. During orbital movement of orbiting scroll member 56 with respect to non-orbiting scroll member 74 creates moving pockets of fluid which are compressed as the pocket moves from a radially outer position to a central position of scroll members 56 and 74. Non-orbiting scroll member 74 is mounted to main bearing
20 housing 24 in any desired manner which will provide limited axial movement of non-orbiting scroll member 74. The specific manner of such mounting is not critical to the present invention. However, in the preferred embodiment, non-orbiting scroll member 74 has a plurality of circumferentially spaced mounting bosses 76 (see Figures 2 and 3), each having a flat upper surface 78 and an axial bore 80. A sleeve 82 is slidably
25 disposed within bore 80 and sleeve 82 is bolted to main bearing housing 24 by a bolt 84. Bolt 84 has an enlarged head which engages upper surface 78 to limit the axial upper or separating movement of non-orbiting scroll member 74. Movement of non-

orbiting scroll member 74 in the opposite direction is limited by axial enlargement of the lower tip surface of wrap 72 and the flat upper surface of orbiting scroll member 56.

Non-orbiting scroll member 74 has a centrally disposed discharge port 88 which is in fluid communication via an opening 90 in partition 20 with a discharge muffler 92 defined by cap 14 and partition 20. Fluid compressed by the moving pockets between scroll wraps 60 and 72 discharges into discharge muffler 92 through port 88 and opening 90. Non-orbiting scroll member 74 has in the upper surface thereof an annular recess 94 having parallel coaxial sidewalls within which is sealing disposed for relative axial movement an annular seal assembly 96 which serves to isolate the bottom of recess 94 so that it can be placed in fluid communication with a source of intermediate fluid pressure by means of a passageway 98. Non-orbiting scroll member 74 is thus axially biased against orbiting scroll member 56 by the forces created by discharge pressure acting on the central portion of non-orbiting scroll member 74 and the forces created by intermediate fluid pressure acting on the bottom of recess 94. This axial pressure biasing, as well as the various techniques for supporting non-orbiting scroll member 74 for limited axial movement, are disclosed in much greater detail in assignee's aforementioned U.S. Patent No. 4,877,382.

Relative rotation of scroll members 56 and 74 is prevented by the usual Oldham Coupling 100 having a pair of key slidably disposed in diametrically opposing slots in non-orbiting scroll member 74 and a second pair of keys slidably disposed in diametrically opposed slots in orbiting scroll member 56.

Compressor 10 is preferably of the "low side" type in which suction gas entering shell 12 is allowed, in part, to assist in cooling the motor. So long as there is an adequate flow of returning suction gas, the motor will remain within the desired temperature limits. When this flow ceases, however, the loss of cooling will cause motor protector 52 to trip and shut compressor 10 down.

The scroll compressor, as thus broadly described, is either known in the art or it is the subject matter of other pending applications for patent by Applicant's assignee. The details of construction which incorporate the principles of the present invention are those which deal with a unique fluid injection system identified generally by reference numeral 110. Fluid injection system 110 can be used to inject liquid refrigerant for cooling purposes, vapor or gaseous refrigerant for capacity increase, oil for lubrication and cooling or fluid injection system 110 can be used for capacity modulation. The present invention, for exemplary purposes, will be described using a vapor injection system as fluid injection system 110 but it is to be understood that other fluids could be injected or fluids can be vented using fluid injection system 110.

Referring now to Figures 1-3, fluid injection system 110 comprises a pair of fluid injection passages 112 extending through end plate 58 of orbiting scroll member 56, a pair of generally vertical fluid passages 114 in main bearing housing 24, a generally circular horizontal fluid passage 116 in main bearing housing 24, a generally horizontal fluid passage 118 extending through one of the legs of main bearing housing 24, a fluid injection port 120 extending through shell 12, and a fluid injection fitting 122 secured to the outside of shell 12.

Fluid injection passages 112 extend through end plate 58 of orbiting scroll member 56. The positioning of the opening for passages 112 on the wrap side of the end plate will be determined by the positioning during the compression cycle that fluid is going to be injected or released from a pair of the moving pockets between wraps 60 and 72. The positioning of the opening for passages 112 on thrust surface 62 of scroll member 56 will be such that the opening of passages 112 will always be adjacent thrust bearing surface 54 of main bearing housing 24 throughout the entire orbital movement of orbiting scroll member 56. This feature is described below as it relates to fluid passage 114.

Fluid passages 114 each extend vertically from thrust bearing surface 54 to fluid passage 116. Each fluid passage 114 comprises a counter bored portion 124 which opens up on thrust bearing surface 54. Counter bored portions 124 are sized such that fluid communication is always maintaining with its respective fluid injection hole 112 during all orbiting movement of orbiting scroll member 56.

Generally circular horizontal passage 116 extends between the pair of fluid passages 114 and horizontal fluid passage 118. Fluid passage 118 extends generally horizontally through one of the legs of main bearing housing 24. Fluid passage 118 opens to injection port 120 which extends through shell 12. Fluid injection fitting 122 is secured to shell 12 by welding and it includes a central bore 126 in fluid communication with port 120.

Thus, access from injection fitting 122 to the moving compression pockets between scroll wraps 60 and 72 is provided through bore 126, through port 120, through passage 118, through passage 116, through passages 114 and counter bore 124, and through passages 112. Fluid can be injected into the moving pockets between scroll wraps 60 and 72 or fluid can be removed from the moving pockets between scroll wraps 72 and 66 through fitting 122.

Referring now to Figures 4 and 5, a fluid injection system 210 according to another embodiment of the present invention is illustrated. Fluid injection system 210 is similar to fluid injection system 110 except that fluid injection system 210 incorporates an internal valve system 230 which can replace any type of external valve system incorporated with fluid injection system 110. Internal valve system 230 is disposed inside shell 12 as opposed to an external system. Internal valve system 230 comprises a slider valve 232, a valve guide support 234, a valve return spring 236 and an activating fitting 238.

Slider valve 232 is slidingly disposed within a bore 240 which intersects with generally horizontal fluid passage 118. A pair of seals 242 seal the fluid within fluid

passage 118 from bore 240. Slider valve 232 defines a vapor injection through hole 244 and a modulation slot 246. Vapor injection through hole 244 is utilized for providing vapor injection into the fluid pockets between scroll wraps 60 and 72 to increase the capacity of the compressor. Modulation slot 246 is utilized for providing delayed
5 compression by releasing the compressed fluid in the fluid pockets between scroll wraps 60 and 72 to modulate or reduce the capacity of the compressor. The combination of the vapor injection and the delayed compression allows for an increase in the modulation of the compressor when the full capacity of the compressor is with vapor injection. Assuming a compressor without vapor injection operates at 100% capacity
10 and, with capacity modulation due to delayed compression, the capacity is reduced to approximately 60%, the incorporation of vapor injection will increase its capacity to approximately 120%. When valve system 230 switches from vapor injection to modulation, the capacity will reduce to the original 60%. Thus, a 60% capacity modulation (100% to 60%) becomes a 50% capacity modulation (120% to 60%).

15 Valve guide support 234 is attached to an adjacent leg of main bearing housing 24 and it defines a bore 248 which slidably receives slider valve 232 and guides its movement. Valve return spring 236 is located between valve guide support 234 and slider valve 232 to bias slider valve 232 into its vapor injection position as shown in Figure 4. Activating fitting 238 is in communication with one end of bore 240 through
20 a bore 250 in fitting 248, a port 252 in shell 12 and a passage 254 in the leg of main bearing housing 24. Bore 250 is connected to a source of pressurized fluid, such as the discharge pressure of the compressor, through a valve such as a solenoid valve. When this pressurized fluid is provided to the end of bore 240, slider valve 232 moves from its position shown in Figure 4 to a position where modulation slot 246 aligns with fluid
25 passage 118 to permit modulation of the capacity of the compressor through a port 260 extending through main bearing housing 24. A seal 256 isolates the pressurized fluid provided through activating fitting 238. When the vapor injection feature is again

desired, the pressurized fluid can be released from fitting 238 allowing valve return spring 236 to again align vapor injection through hole with passage 118 as shown in Figure 4.

Referring now to Figures 6 and 7, a fluid injection system 310 according to another embodiment of the present invention is illustrated. Fluid injection system 310 provides an alternative method for accessing the moving pockets defined by wraps 66 and 72. Fluid injection system 310 comprises the pair of fluid injection passages 112, a pair of generally vertical fluid passages 314, a pair of tubing assemblies 316, a tubing connector assembly 318, a fluid injection port 320 and a fluid injection fitting 322.

Fluid passages 314 each extend generally vertical from thrust bearing surface 54 to the internal suction area of shell 12. Each fluid passage 314 comprises counter bored portion 124 which opens up on thrust bearing surface 54. Counter bore portions 124 maintaining communication with their respective injection hole 112 during all movement of orbiting scroll member 56. The lower ends of fluid passages 314 each define an enlarged bore 324 which mates with a respective tubing assembly 316.

Each tubing assembly 316 extends between tubing connector assembly 318 and a respective enlarged bore 324. Each tubing assembly 316 includes a fitting 326 which engages a respective bore 324 and a tube 328 which extends between fitting 326 and tubing connector assembly 318. A seal 330 seals the interface between bore 324 and fitting 326, and a retainer 332 keeps fitting 326 disposed within bore 324.

Tubing connector assembly 318 comprises a main bearing housing fitting 340 and a connecting tube 342. Fitting 340 is secured to main bearing housing 24 by a plurality of bolts. Fitting 340 defines an internal bore 344 which is communication with the pair of tubes 328. Connecting tube 342 is disposed within bore 344 of fitting and extends to fluid injection fitting 322. A seal 346 seals the interface between tube 342 and bore 344.

Fluid injection fitting 322 extends through port 320 and is secured to shell 12 and it defines an internal bore 350 which receives the opposite end of connecting tube 342. A seal 352 seals the interface between tube 342 and bore 350. Thus, fitting 322 is in communication with pockets of compressed moving fluid defined by wraps 60 and 72 through bore 350, tube 342, bore 344, tubes 328, fitting 326, fluid passages 314 and injection passages 112.

Fluid injection system 310 also includes a check valve 360 which allows fluid flow from fitting 322 to injection passages 112 but prohibits fluid flow from injection passages 112 to fitting 322.

While the above detailed description describes the preferred embodiment of the present invention, it should be understood that the present invention is susceptible to modification, variation and alteration without deviating from the scope and fair meaning of the subjoined claims.

What is claimed is:

1. A scroll-type compressor for handling a working fluid, said compressor comprising:

a shell having a suction zone and a discharge zone;

5 a first scroll member disposed in said shell and having a first scroll wrap extending from a first end plate;

a second scroll member disposed in said shell and having a second scroll wrap extending from a second end plate, said second scroll wrap being intermeshed with said first scroll wrap to define a plurality of closed pockets;

10 a drive mechanism for causing said second scroll member to orbit with respect to said first scroll member, said plurality of pockets moving from a radial outer position in said suction zone to a central position in said discharge zone;

a fluid circuit in communication with at least one of said plurality of pockets, said fluid circuit including a fluid passage extending from said one pocket to
15 a position outside said shell, said fluid passage extending through said second scroll member.

2. The scroll-type compressor according to Claim 1, further comprising a housing disposed within said shell, said housing supporting said second scroll member, said fluid passage extending through said housing.

3. The scroll-type compressor according to Claim 2, further comprising a valve disposed within said housing, said valve controlling fluid flow through said fluid passage.

4. The scroll-type compressor according to Claim 3, wherein said valve is controlled by a pressurized fluid from outside said shell.

5. The scroll-type compressor according to Claim 4, further comprising a valve for controlling fluid flow through said fluid passage.

6. The scroll-type compressor according to Claim 5, wherein said valve is disposed within said shell.

7. The scroll-type compressor according to Claim 6, wherein said valve is controlled by a pressurized fluid from outside said shell.

8. The scroll-type compressor according to Claim 1, further comprising a housing having a plurality of legs disposed within said shell, said housing supporting said first scroll member, said fluid passage extending through one of said legs of said housing.

9. The scroll-type compressor according to Claim 8, further comprising a valve disposed within said housing, said valve controlling fluid flow through said fluid passage.

10. The scroll-type compressor according to Claim 9, wherein said valve is controlled by a pressurized fluid from outside said shell.

11. A scroll-type compressor for handling a working fluid; said compressor comprising:

a shell;

5 a non-orbiting scroll member disposed within said shell and having a non-orbiting scroll wrap extending from a non-orbiting end plate;

an orbiting scroll member disposed within said shell and having an orbiting scroll wrap extending from an orbiting end plate, said orbiting scroll wrap being intermeshed with said non-orbiting scroll member to define a plurality of closed pockets;

10 a drive mechanism for causing said orbiting scroll member to orbit with respect to said non-orbiting scroll member, said plurality of closed pockets moving from a radial outer position where said working fluid is at a suction pressure to a radially inner central position where said working fluid is at a higher discharge pressure during said orbital movement;

15 a fluid circuit in communication with at least one of said plurality of moving pockets, said fluid circuit including a fluid passage extending from said one pocket to a position outside of said shell, said fluid pocket extending through said orbiting scroll member.

12. The scroll-type compressor according to Claim 11, further comprising a housing disposed within said shell, said housing supporting said orbiting scroll member, said fluid passage extending through said housing.

13. The scroll-type compressor according to Claim 12, further comprising a valve disposed within said housing, said valve controlling fluid flow through said fluid passage.

14. The scroll-type compressor according to Claim 13, wherein said valve is controlled by a pressurized fluid from outside said shell.

15. The scroll-type compressor according to Claim 11 further comprising a valve for controlling fluid flow through said fluid passage.

16. The scroll-type compressor according to Claim 15, wherein said valve is disposed within said shell.

17. The scroll-type compressor according to Claim 16, wherein said valve is controlled by a pressurized fluid from outside said shell.

18. The scroll-type compressor according to Claim 1, further comprising a housing having a plurality of legs disposed within said shell, said housing supporting said orbiting scroll member, said fluid passage extending through one of said legs of said housing.

19. The scroll-type compressor according to Claim 18, further comprising a valve disposed within said one leg of said housing, said valve controlling fluid flow through said fluid passage.

20. The scroll-type compressor according to Claim 19, wherein said valve is controlled by a pressurized fluid from outside said shell.

21. A scroll-type compressor for handling a working fluid, said compressor comprising:

a shell having a suction zone and a discharge zone;

5 a first scroll member disposed in said shell and having a first scroll wrap extending from a first end plate;

a second scroll member disposed in said shell and having a second scroll wrap extending from a second end plate, said second scroll wrap being intermeshed with said first scroll wrap to define a plurality of closed pockets;

10 a drive mechanism for causing said second scroll member to orbit with respect to said first scroll member, said plurality of pockets moving from a radial outer position in said suction zone to a central position in said discharge zone;

15 a fluid circuit in communication with at least one of said plurality of pockets, said fluid circuit including a fluid passage extending from said one pocket to said suction zone of said compressor, said fluid passage extending through said second scroll member.

22. The scroll-type compressor according to Claim 21, wherein said first scroll member is a non-orbiting scroll and said second scroll member is an orbiting scroll.

23. The scroll-type compressor according to Claim 21, further comprising a housing disposed within said shell, said housing supporting said second scroll member, said fluid passage extending through said housing.

24. The scroll-type compressor according to Claim 23, further comprising a valve disposed within said housing, said valve controlling fluid flow through said fluid passage.

25. The scroll-type compressor according to Claim 24, wherein said valve is controlled by a pressurized fluid from outside said shell.

26. The scroll-type compressor according to Claim 24, wherein said valve is movable between a first position where said fluid passage communicates with said suction zone of said compressor and a second position where said fluid passage communicates with a position outside said shell.

27. The scroll-type compressor according to Claim 21, further comprising a valve for controlling fluid flow through said fluid passage.

28. The scroll-type compressor according to Claim 27, wherein said valve is disposed within said shell.

29. The scroll-type compressor according to Claim 28, wherein said valve is controlled by a pressurized fluid from outside said shell.

30. The scroll-type compressor according to Claim 27, wherein said valve is movable between a first position where said fluid passage communicates with said suction zone of said compressor and a second position where said fluid passage communicates with a position outside said shell.



31. The scroll-type compressor according to Claim 21, further comprising a housing having a plurality of legs disposed within said shell, said housing supporting said first scroll member, said fluid passage extending through one of said legs of said housing.

32. The scroll-type compressor according to Claim 31, further comprising a valve disposed within said housing, said valve controlling fluid flow through said fluid passage.

33. The scroll-type compressor according to Claim 32, wherein said valve is controlled by a pressurized fluid from outside said shell.

Abstract of the Disclosure

A scroll compressor includes a fluid injection system. The fluid injection system includes a fluid passage which extends from a position outside of the shell of the compressor to the fluid pockets created by the wraps of the scroll members. The fluid
5 passage extends through the orbiting scroll member. The fluid injection system can be used to inject gaseous or liquid refrigerant, lubricant or the fluid injection system can be used to vent the moving pocket to the suction area of the compressor for capacity modulation.

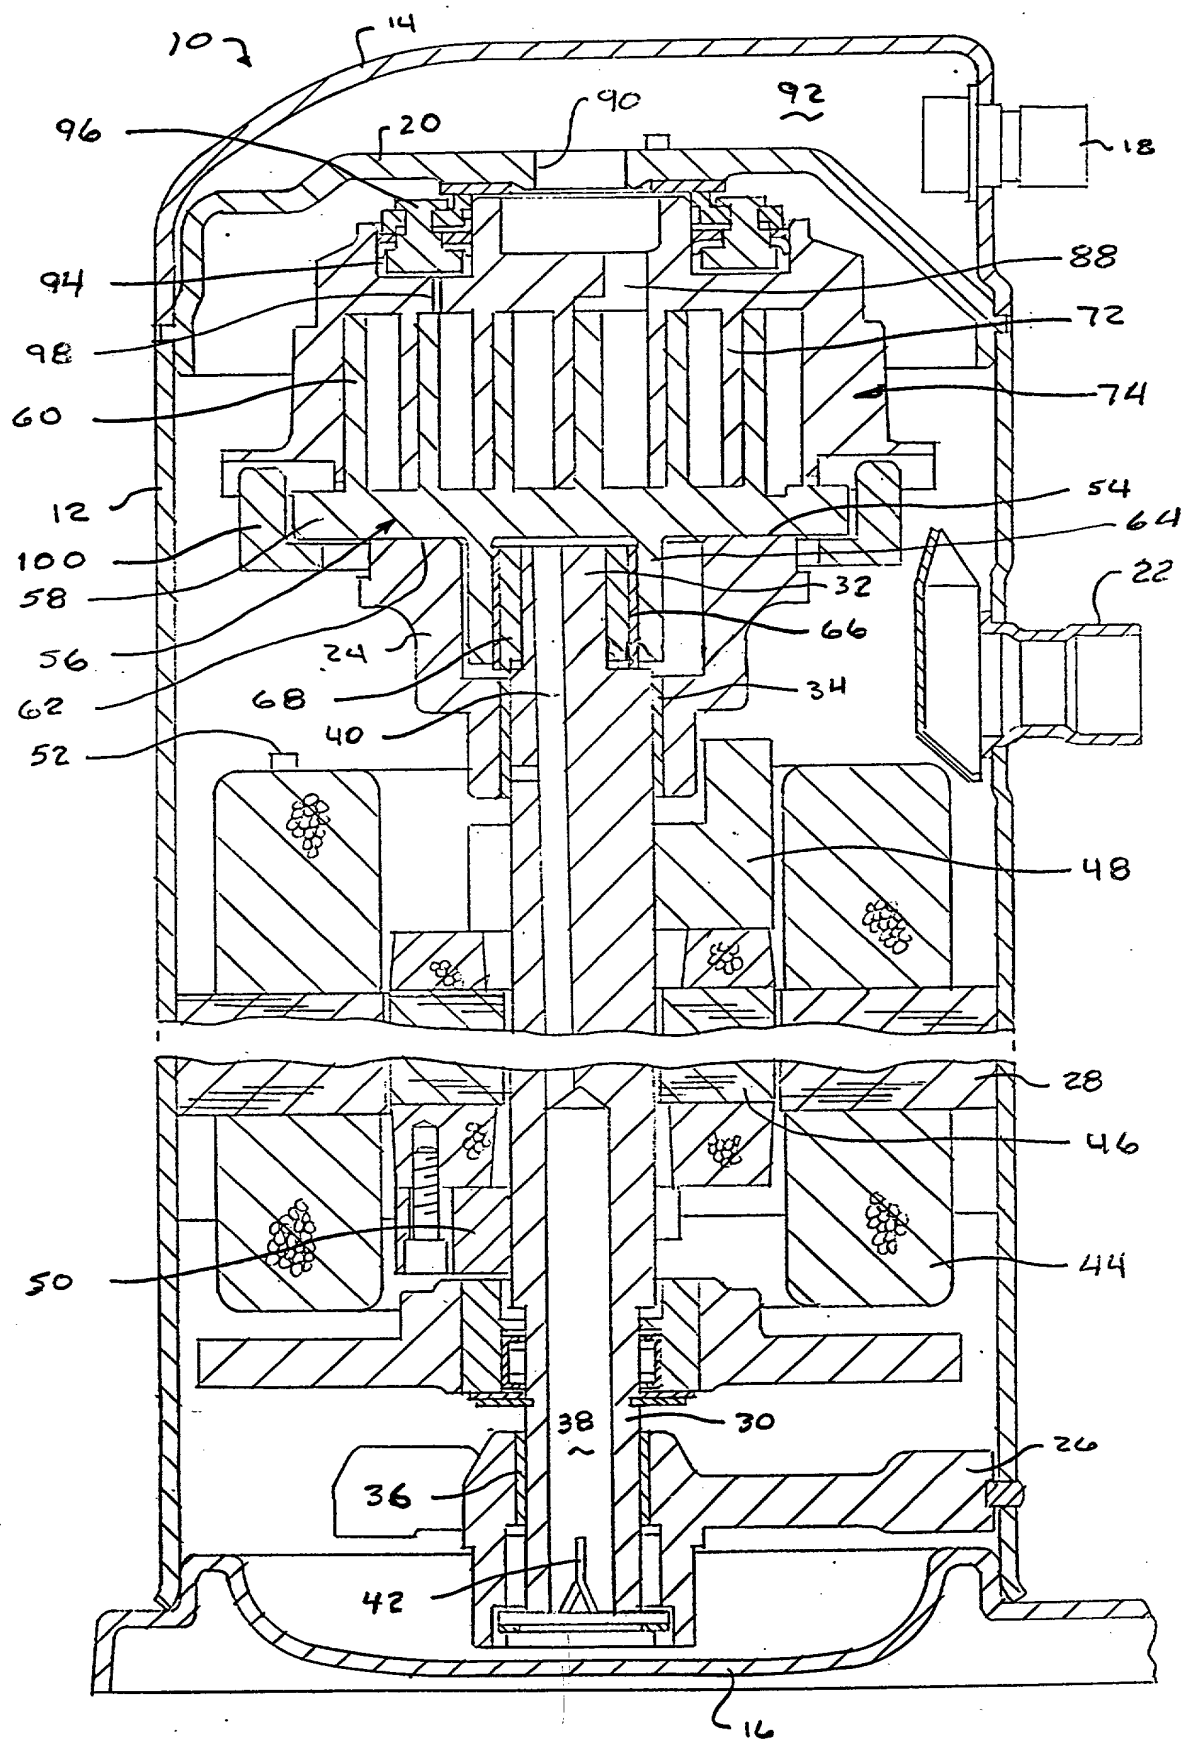

005780 40062500

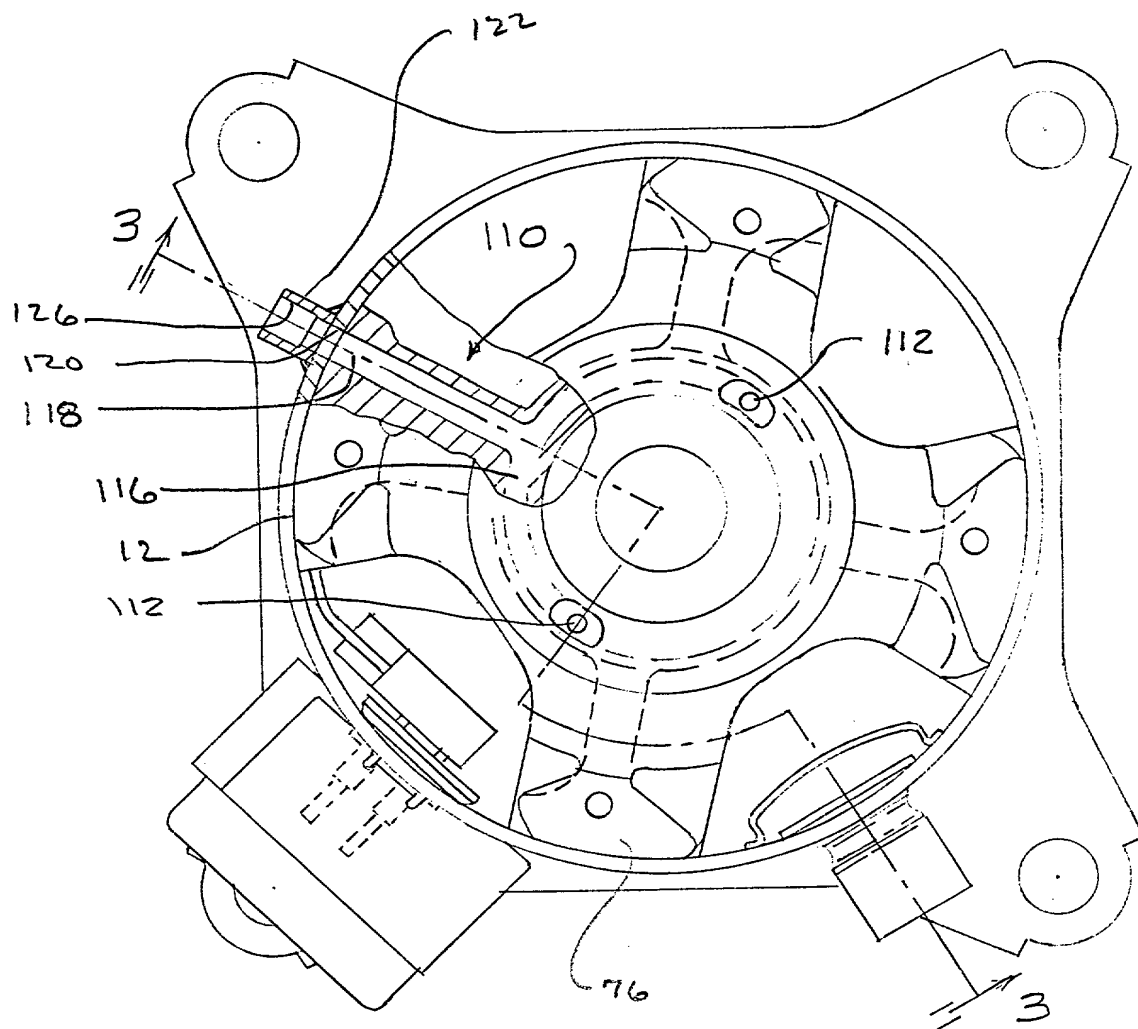


Fig. 2.

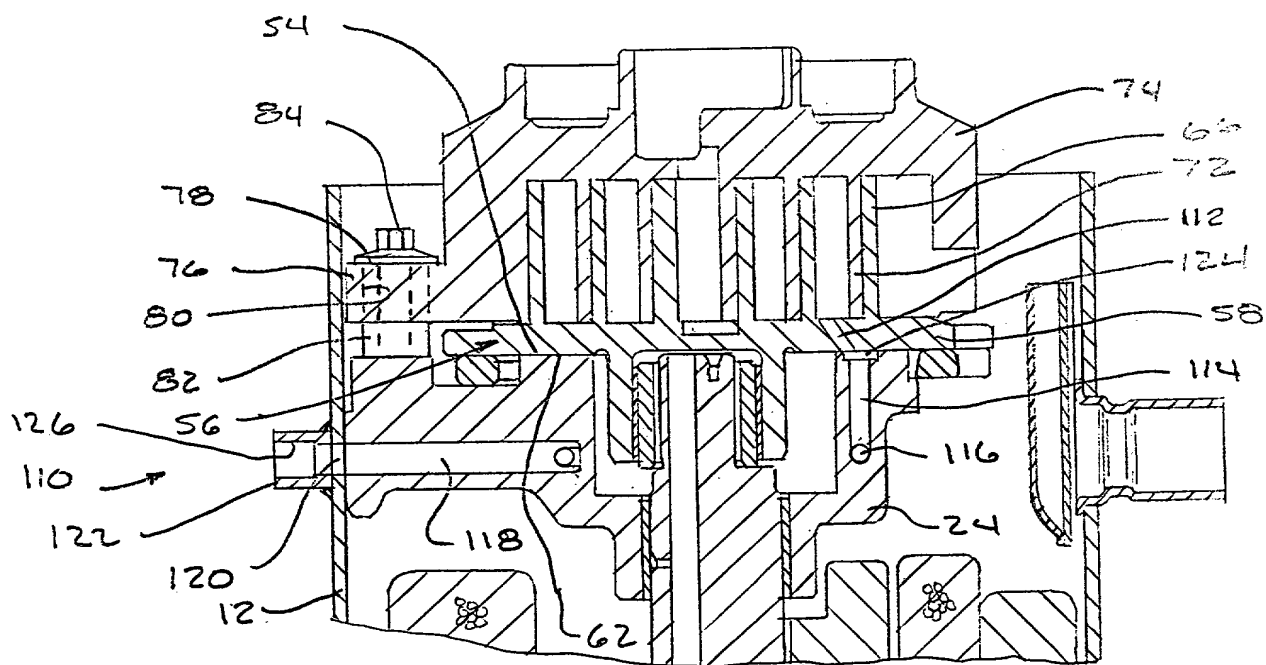


Fig. 3.

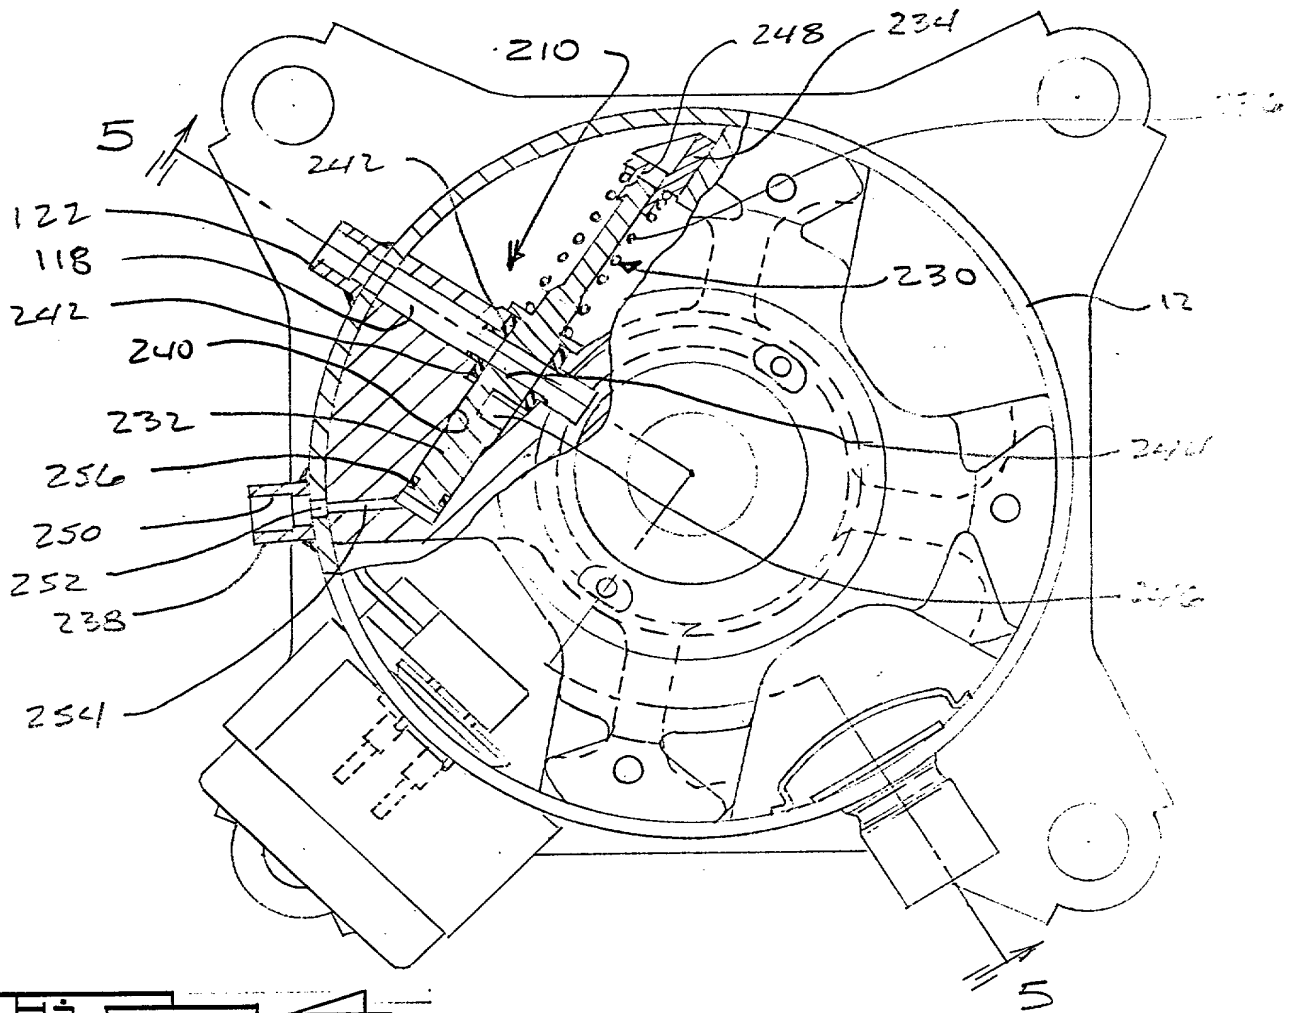


FIG. 4.

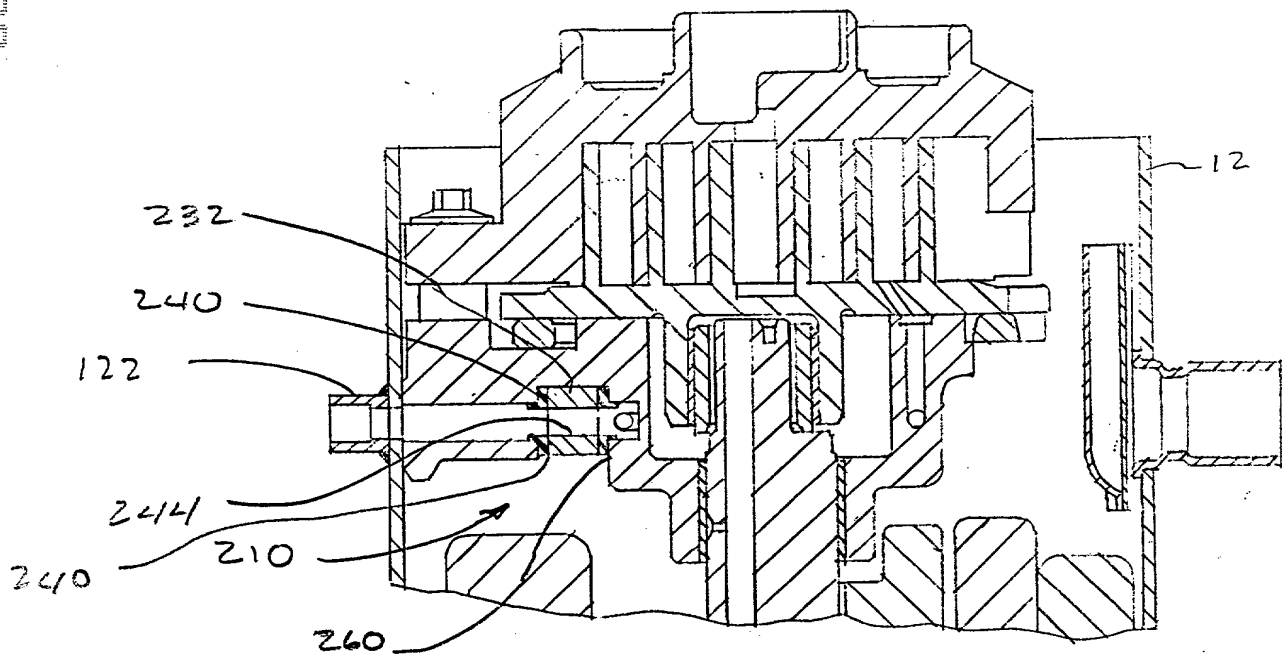


FIG. 5.

005180 40062960


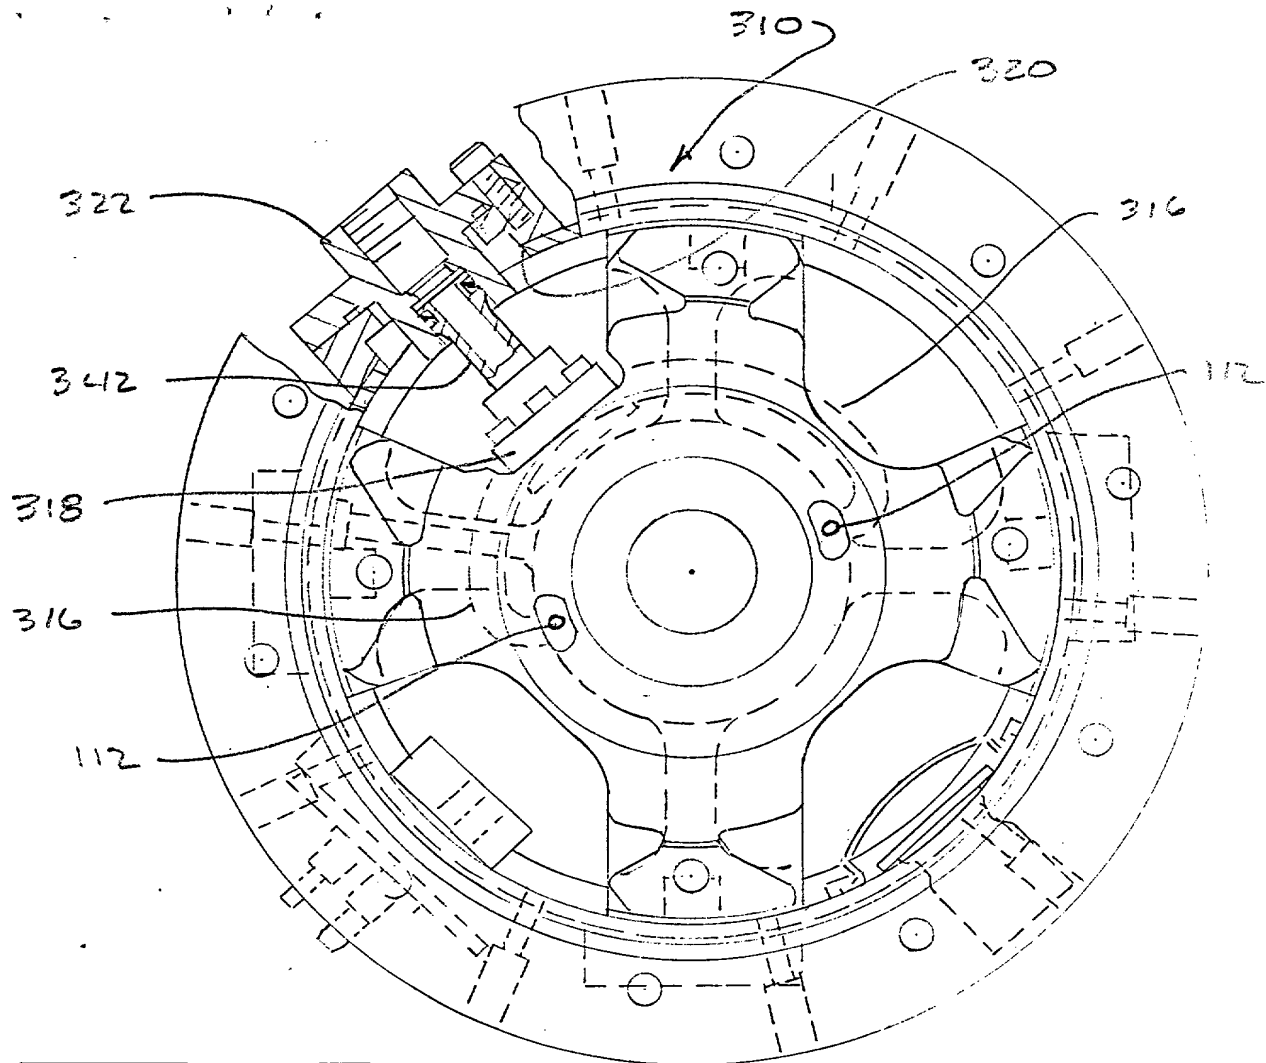


FIG. 6

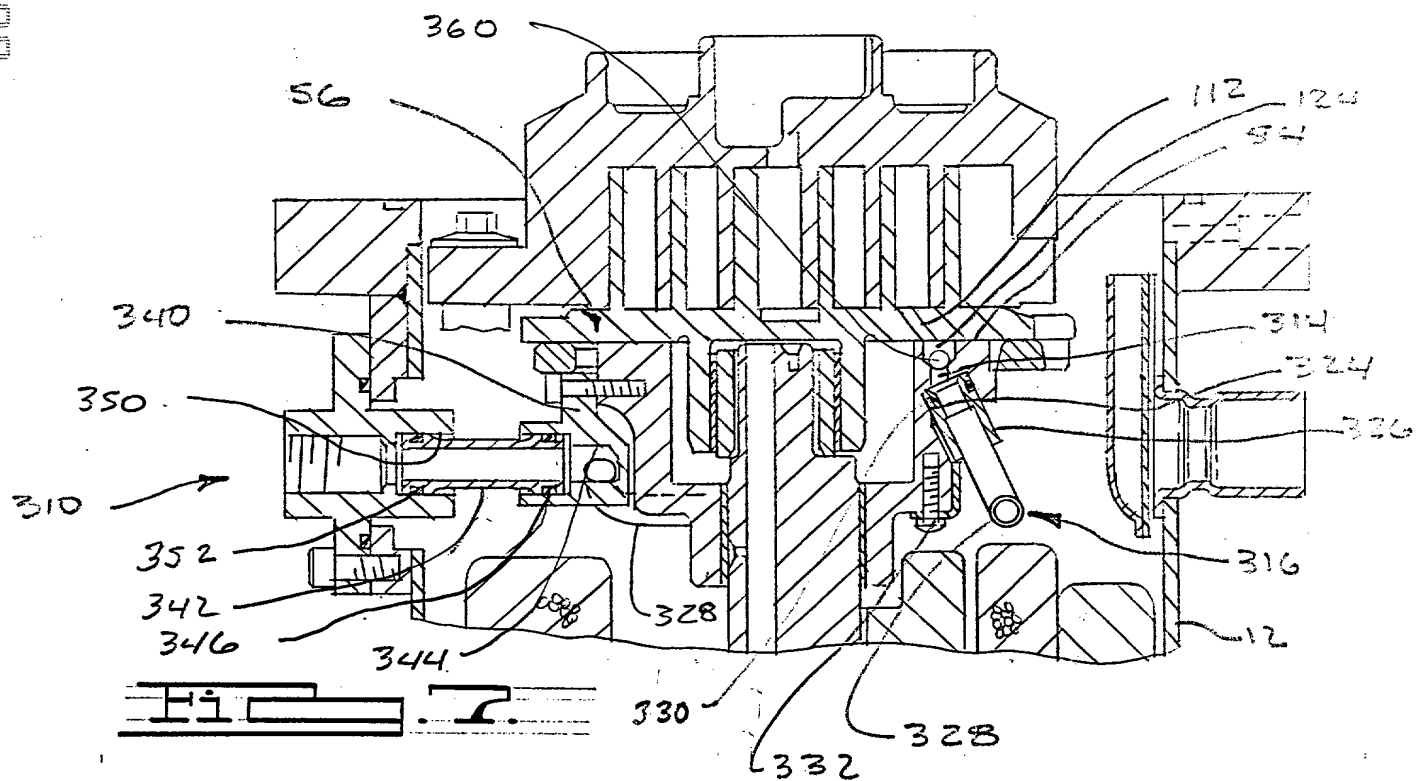

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, being duly sworn, I depose and say that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SCROLL MACHINE WITH PORTED ORBITING SCROLL MEMBER

the specification of which (check one)

- ☒ is attached hereto.
- ☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application or to the patentability of the invention claimed therein in accordance with Title 37, Code of Federal Regulations, section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, section 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

			Priority Claim	
(Number)	(Country)	(Day/Month/Year filed)	Yes	No
_____	_____	_____	_____	_____
(Number)	(Country)	(Day/Month/Year filed)	Yes	No
_____	_____	_____	_____	_____
(Number)	(Country)	(Day/Month/Year filed)	Yes	No
_____	_____	_____	_____	_____

DECLARATION AND POWER OF ATTORNEY

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States Provisional application(s) listed below:

PRIOR PROVISIONAL APPLICATIONS

(application serial number)

(Month / Day / Year filed)

(application serial number)

(Month / Day / Year filed)

I hereby claim the benefit under Title 35, United States Code, section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status - patented, pending, abandoned
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint Michael J. Schmidt Reg. No. 34,007, and each principal, attorney of counsel, associate and employee of Harness, Dickey & Pierce, P.L.C., who is a registered Patent Attorney, my attorney with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. I request the Patent and Trademark Office to direct all correspondence and telephone calls relative to this application to Harness, Dickey & Pierce, P.L.C., P.O. Box 828, Bloomfield Hills, Michigan 48303 (telephone 810-641-1600).

DECLARATION AND POWER OF ATTORNEY

Full name of sole or first inventor: Michael Mikhaylovich Perevozchikov

Inventor's signature: Michael Perevozchikov

Date: 08/08/2000

Residence: 240 Westhaven Drive, Troy, Ohio 45372

Citizenship: Russian

Post Office Address: same as above

Full name of second joint inventor: Roy Doepker

Second Inventor's signature: Roy Doepker

Date: 8/8/00

Residence: 2042 Sandy Lane, Lima, Ohio 45806

Citizenship: United States of America

Post Office Address: same as above

State of Ohio)
County of Shelby) ss. MICHAEL MIKHAYLOVICH PEREVOZCHIKOV

On this 8th day of August, 2000, before me personally appeared the foregoing individual, who executed the foregoing instrument and who acknowledged to me that they executed the same of their own free will for the purpose therein set forth.

(seal)

Susan H. Miller
Notary Public,
Cuyahoga County, State of Ohio
My Commission Expires: 6-30-02

State of Ohio)
County of Shelby) ss. ROY DOEPKER

On this 8th day of August, 2000, before me personally appeared the foregoing individual, who executed the foregoing instrument and who acknowledged to me that they executed the same of their own free will for the purpose therein set forth.

(seal)

Susan H. Miller
Notary Public,
Cuyahoga County, State of Ohio
My Commission Expires: 6-30-02